


**laminat.**



BERRY  ALLOC

# Collection overview.

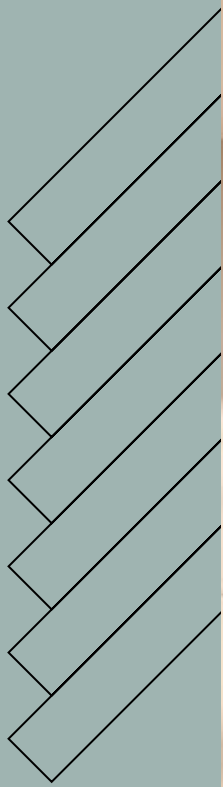

# Technical overview.

splash resistant				
Plank length	504 mm	1288 mm		2038 mm
	84 mm	190 mm		241 mm
Plank width	84 mm	190 mm		241 mm
Plank thickness	8 mm	8 mm		8 mm
Bevels	4	0	4	4
Usage class EN10874	23/32	23/32	23/32	23/32
Collection	/ chateau.	/ connect 8.	/ connect 8 V4.	/ connect 8 XL.
Residential Warranty	Lifetime	Lifetime	Lifetime	Lifetime
Commercial Warranty	5 Y	5 Y	5 Y	5 Y
Loc system	Chateau Loc	DuoLoc	DuoLoc	PentaLoc
Hydro+ technology				
Floor heating compatibility	•	•	•	•
Abrasion resistance EN13329	AC4	AC4	AC4	AC4
Impact resistance small ball EN 13329	≥ 35 mm	≥ 35 mm	≥ 35 mm	≥ 35 mm
Impact resistance big ball EN 13329	≥ 750 mm	≥ 750 mm	≥ 750 mm	≥ 750 mm
Thickness swelling ISO24336	12% (requirement ≤ 18%)	12% (requirement ≤ 18%)	12% (requirement ≤ 18%)	12% (requirement ≤ 18%)
Fire resistance EN13501-1	Cfl-S1	Cfl-S1	Cfl-S1	Cfl-S1
Formaldehyde EN717-1	E1	E1	E1	E1
Slipperiness EN13893	DS	DS	DS	DS
Density EN323	900 kg/m <sup>3</sup>	900 kg/m <sup>3</sup>	900 kg/m <sup>3</sup>	900 kg/m <sup>3</sup>
Resistance to staining EN438	5 (groups 1+2), 4 (group 3)	5 (groups 1+2), 4 (group 3)	5 (groups 1+2), 4 (group 3)	5 (groups 1+2), 4 (group 3)
Effect of a furniture leg EN16581	No damage (foot type 0)	No damage (foot type 0)	No damage (foot type 0)	No damage (foot type 0)
Effect of a castor chair EN425	No damage with type W wheels	No damage with type W wheels	No damage with type W wheels	No damage with type W wheels
Thermal resistance in combination with Excellence Plus	0,08 m <sup>2</sup> K/W	0,08 m <sup>2</sup> K/W	0,08 m <sup>2</sup> K/W	0,08 m <sup>2</sup> K/W
CE mark	•	•	•	•
UKCA mark	•	•	•	•
PEFC	•	•	•	•
French VOC emission regulation	A	A+	A+	A+
Planks/pack	24	9	9	6
m <sup>2</sup> /pack	1,02	2,20	2,20	2,95
Weight/pack kg	7	15,7	15,7	21,1
Packs/pallet	48	56	56	54
m <sup>2</sup> /pallet	49	123,3	123,3	159,1
Weight/pallet kg	365	891	891	1159

100% water resistant					
Plank length	1288 mm			2038 mm	
	190 mm			241 mm	
Plank width	84 mm	10 (8+2) mm	12 mm	8 mm	12 mm
Plank thickness	8 mm	10 (8+2) mm	12 mm	8 mm	12 mm
Bevels	4	4	4	4	4
Usage class EN10874	23/32	23/32	23/33	23/32	23/33
Collection	/ ocean 8 V4.	/ ocean 8 PA.	/ ocean 12 V4.	/ ocean 8 XL.	/ ocean 12 XL.
Residential Warranty	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime
Commercial Warranty	5 Y	5 Y	10 Y	5 Y	10 Y
Loc system	DuoLoc	DuoLoc	PentaLoc	PentaLoc	PentaLoc
Hydro+ technology	•	•	•	•	•
Floor heating compatibility	•	•	•	•	•
Abrasion resistance EN13329	AC4	AC4	AC5	AC4	AC5
Impact resistance small ball EN 13329	≥ 35 mm	≥ 35 mm	≥ 70 mm	≥ 35 mm	≥ 70 mm
Impact resistance big ball EN 13329	≥ 750 mm	≥ 750 mm	≥ 1000 mm	≥ 750 mm	≥ 1000 mm
Thickness swelling ISO24336	12% (requirement ≤ 18%)	12% (requirement ≤ 18%)	12% (requirement ≤ 15%)	12% (requirement ≤ 18%)	12% (requirement ≤ 15%)
Fire resistance EN13501-1	Cfl-S1	Cfl-S1	Cfl-S1	Cfl-S1	Cfl-S1
Formaldehyde EN717-1	E1	E1	E1	E1	E1
Slipperiness EN13893	DS	DS	DS	DS	DS
Density EN323	900 kg/m <sup>3</sup>	900 kg/m <sup>3</sup>	900 kg/m <sup>3</sup>	900 kg/m <sup>3</sup>	900 kg/m <sup>3</sup>
Resistance to staining EN438	5 (groups 1+2), 4 (group 3)	5 (groups 1+2), 4 (group 3)	5 (groups 1+2), 4 (group 3)	5 (groups 1+2), 4 (group 3)	5 (groups 1+2), 4 (group 3)
Effect of a furniture leg EN16581	No damage (foot type 0)	No damage (foot type 0)	No damage (foot type 0)	No damage (foot type 0)	No damage (foot type 0)
Effect of a castor chair EN425	No damage with type W wheels	No damage with type W wheels	No damage with type W wheels	No damage with type W wheels	No damage with type W wheels
Thermal resistance in combination with Excellence Plus	0,08 m <sup>2</sup> K/W	0,10 m <sup>2</sup> K/W*	0,12 m <sup>2</sup> K/W	0,08 m <sup>2</sup> K/W	0,12 m <sup>2</sup> K/W
CE mark	•	•	•	•	•
UKCA mark	•	•	•	•	•
PEFC	•	•	•	•	•
French VOC emission regulation	A+	A+	A+	A+	A+
Planks/pack	9	7	6	6	4
m <sup>2</sup> /pack	2,20	1,71	1,47	2,95	1,96
Weight/pack kg	15,7	12,8	16,0	21,1	21,1
Packs/pallet	56	56	56	54	54
m <sup>2</sup> /pallet	123,3	95,93	82,2	159,1	106,1
Weight/pallet kg	891	729	908	1159	1159

(\*) With the attached underlay.







**BERRY**  **ALLOC**

**BerryAlloc**  
Industrielaan 100  
8930 Menen, Belgium  
T +32 56 67 66 11  
info@berryalloc.com

**berryalloc.com**